


S Series

SI2.9 | SI3.9 | LI4.8
SO3.9 | SO4.8 | SO5.9

- ✦ Front Maintenance
- ✦ Curved Installation
- ✦ No Light Leakage
- ✦ Light and Thin

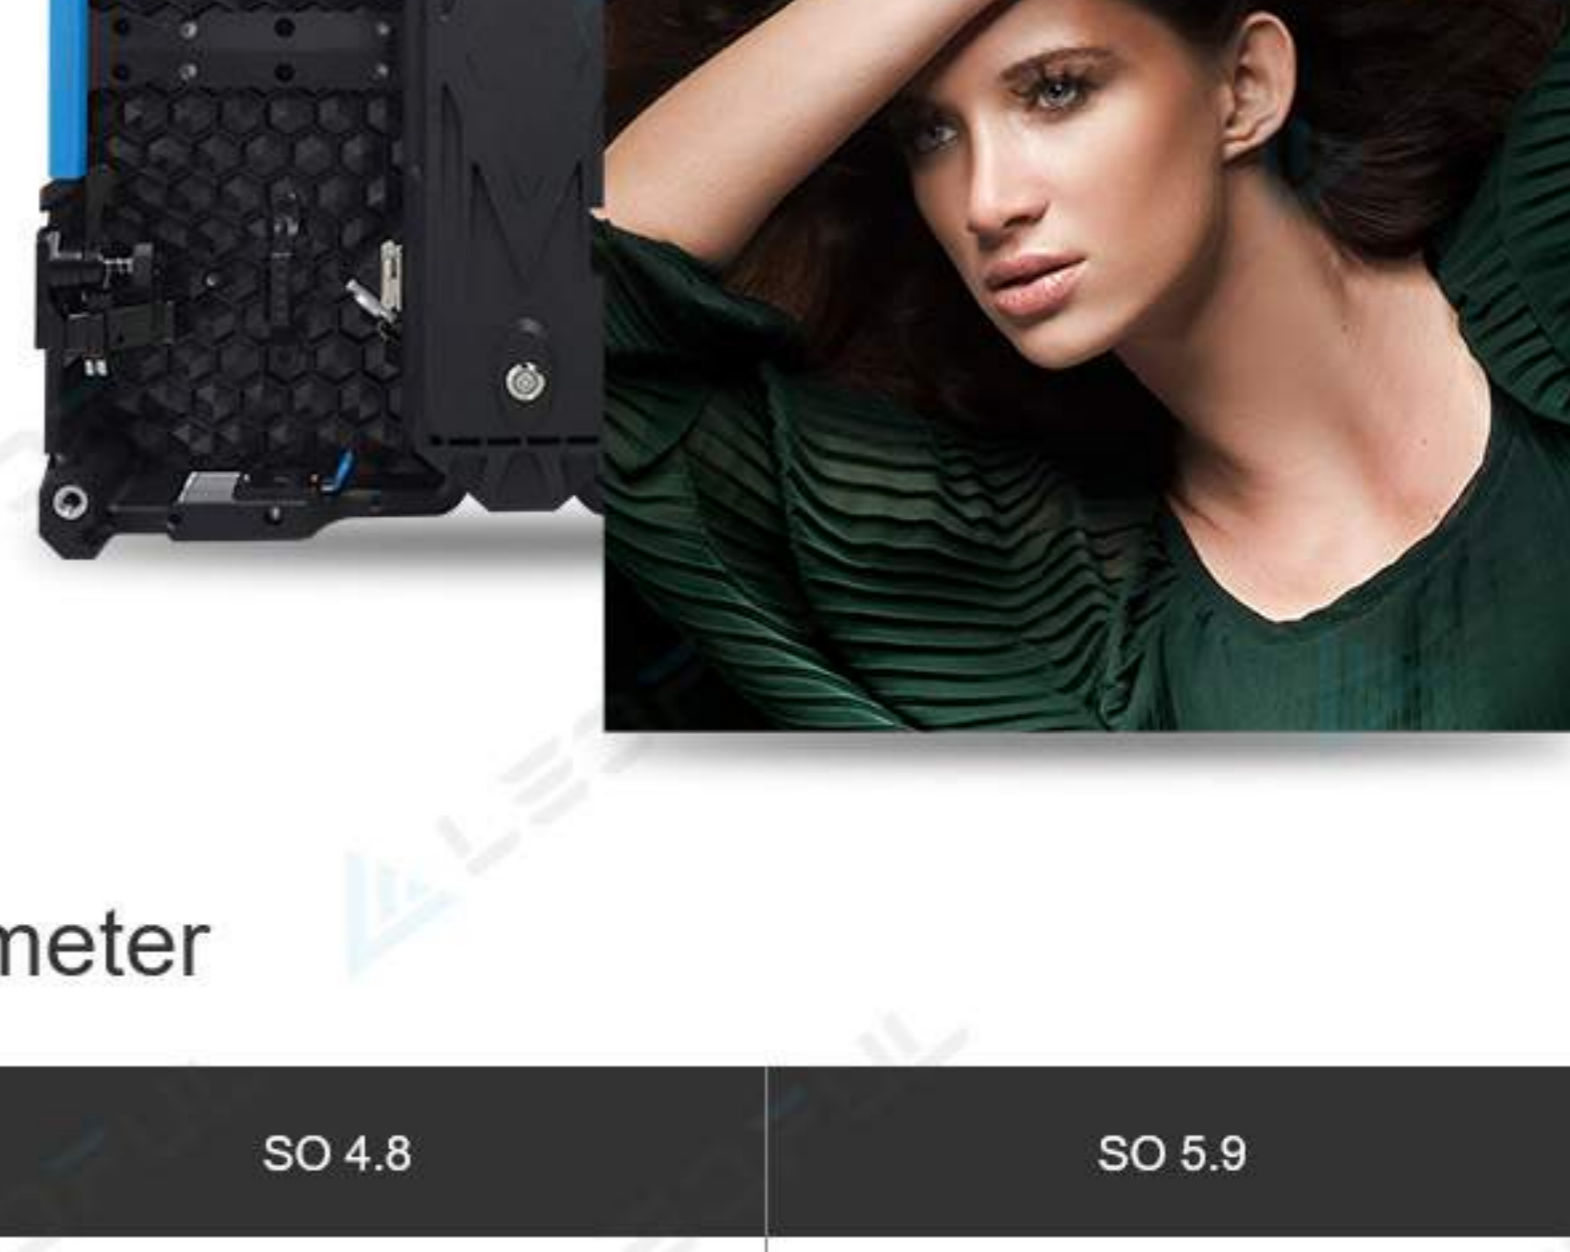

Parameter

S Series Outdoor	SO 3.9	SO 4.8	SO 5.9
Pixel Pitch(mm)	3.91mm	4.81mm	5.95mm
Pixel Matrix Per Sq.m	65536	43264	28224
Pixel Configuration	SMD1921	SMD2727/1921	SMD2727
Brightness (nits)	≥6500	≥5500	≥6500
Scan	1/8	1/13	1/7
Cabinet Resolution	128×128	104×104	84×84
Power Con. (Max / Avg)	790/ 250 w/sq.m	720 / 220 w/sq.m	650/ 220 w/sq.m
Refresh Rate (HZ)	3840	3840	1920
Cabinet Weight	8kg / 17.6lb		
Module Dimension	250x250mm / 0.82x0.82feet		
Cabinet Dimension	500x500x85mm / 1.64x1.64x0.28feet		
Cabinet Material	Die-casting Aluminum		
Service Access	Front / Rear		
Grey Scale (bit)	14		
Viewing Angle (H/V)	140 / 140		
IP Rate	IP65		
Input Voltage (AC)	110 / 240		

* Specifications and photos are subject to change without prior notice.

S Series Indoor	SI 2.9	SI 3.9	SI 4.8
Pixel Pitch(mm)	2.976mm	3.91mm	4.81mm
Pixel Matrix Per Sq.m	112896	65536	43264
Pixel Configuration	SMD1515	SMD2121	SMD2121
Scan	1/28	1/16	1/13
Cabinet Resolution	168×168	128×128	104×104
Power Con. (Max / Avg)	576/ 180w/sq.m	504 / 150w/sq.m	520 / 160w/sq.m
Refresh Rate (HZ)	3840		
Cabinet Weight	8kg / 17.6lb		
Cabinet Material	Die-casting Aluminum		
Module Dimension	250x250mm / 0.82x0.82feet		
Cabinet Dimension	500x500x85mm / 1.64x1.64x0.28feet		
Service Access	Front / Rear		
Brightness (nits)	1000		
Grey Scale (bit)	16		
Viewing Angle (H/V)	140 / 140		
IP Rate	IP43		
Input Voltage (AC)	110 / 240		

* Specifications and photos are subject to change without prior notice.



Front Maintenance

The magnet LED modules can be dismantled by tools on front side.



Curved Installation

Curved with every 2.5° between -10° and 10°, which can make convex and concave.



Ultra Fast Response

The response speed exceeds the response limit of the naked eyes, while playing the high speed dynamic images in an LED Screen, it will have more advantages, there will be no ghosting&twisting and it will perfectly provide the dynamic images.



Perfect rendering dynamic picture



Smear, Ghosting phenomenon

No light leakage trouble

No light leakage design with specific strips on side of cabinet and behind neighbour module.



Wide Viewing Angle

Both 160° from horizontal & vertical for the viewing angle. Seeing from five directions, it would be still the natural and clear image in an LED display.



Faster & Easier Installation

Hanging or stacking, S series with light and thin features makes installation faster and easier.



Accessories

