








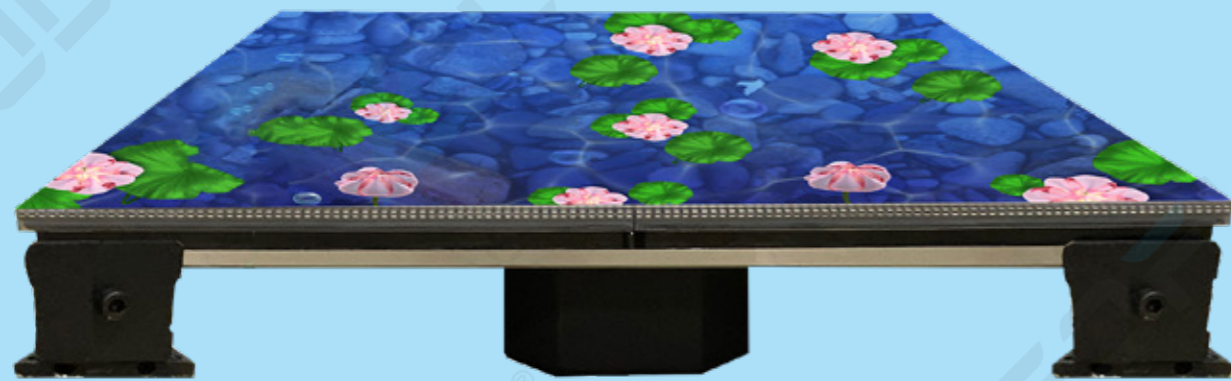


# FLOOR Series

Interactive Floor LED Display

## Applications

-   
Advertising
-   
Science museum Experience Hall
-   
RetailShops
-   
Media Facade
-   
Showroom
-   
Car Dealers
-   
Supermarkets
-   
Consumer Electronic Stores
-   
Shopping Malls



Cabinet size is customizable according to module size 250x250mm

## Specification

Model	FI2.9	FI3.9	FI4.8	FI5.2	FI6.2
Pixel Pitch(mm)	2.976	3.91	4.81	5.2	6.25
Pixel Matrix Per Sq.m	112896	65536	43264	36864	16000
Pixel Configuration	SMD1921	SMD1921	SMD1921	SMD1921	SMD1921
Brightness (nits)	1500	1500	1500	1500	1500
Scan	1/14	1/16	1/16	1/6	1/10
Module Dimension	250x250mm / 0.82x0.82ft	250x250mm / 0.82x0.82ft	250x250mm / 0.82x0.82ft	250x250mm / 0.82x0.82ft	250x250mm / 0.82x0.82ft
Cabinet Dimension	500x1000mm / 1.64x3.28ft	500x1000mm / 1.64x3.28ft	500x1000mm / 1.64x3.28ft	500x1000mm / 1.64x3.28ft	500x1000mm / 1.64x3.28ft
Cabinet Resolution	168x336	128x256	104x208	96x192	80x160
Cabinet Weight	22kg / 48.5lb				
Power Con. (Max / Avg)	1200 / 600 w/sq.m	1200 / 600 w/sq.m	1200 / 600 w/sq.m	1200 / 600 w/sq.m	1200 / 600 w/sq.m
Service Access	Front				
Refresh Rate (HZ)	≥1920				
Grey Scale (bit)	14				
Viewing Angle (H/V)	120 / 120				
IP Rate	IP65				
Operation Temperature	-20° ~ +50°				
Input Voltage (AC)	220V( 50-60Hz)				

Model	FO3.9	FO4.8	FO5.2	FO6.2
Pixel Pitch(mm)	3.91	4.81	5.2	6.25
Pixel Matrix Per Sq.m	65536	43264	36864	16000
Pixel Configuration	SMD1921	SMD1921	SMD1921	SMD1921
Brightness (nits)	4000	4000	4000	4000
Scan	1/16	1/16	1/6	1/10
Module Dimension	250x250mm / 0.82x0.82ft	250x250mm / 0.82x0.82ft	250x250mm / 0.82x0.82ft	250x250mm / 0.82x0.82ft
Cabinet Dimension	500x1000mm / 1.64x3.28ft	500x1000mm / 1.64x3.28ft	500x1000mm / 1.64x3.28ft	500x1000mm / 1.64x3.28ft
Cabinet Resolution	128x256	104x208	96x192	80x160
Cabinet Weight	22kg / 48.5lb			
Power Con. (Max / Avg)	1200 / 600 w/sq.m	1200 / 600 w/sq.m	1200 / 600 w/sq.m	1200 / 600 w/sq.m
Service Access	Front			
Refresh Rate (HZ)	≥1920			
Grey Scale (bit)	14			
Viewing Angle (H/V)	120 / 120			
IP Rate	IP67			
Operation Temperature	-20° ~ 50°			
Input Voltage (AC)	220V( 50-60Hz)			

\* Specifications and photos are subject to change without prior notice.


### Interactive Floor LED Display

Special driving IC built inside the LED display PCB will work together with interactive control system .It will easily and quickly make you interested and attractive between the players and display .









FLOOR LED Display Base Support Installation

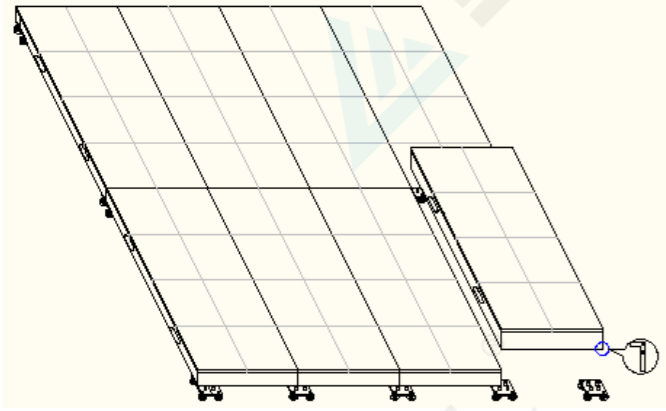

FLOOR LED Display Guide Rail Installation

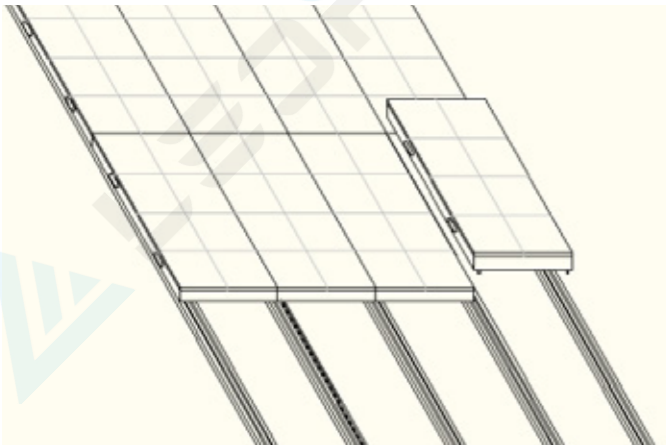

Details Display

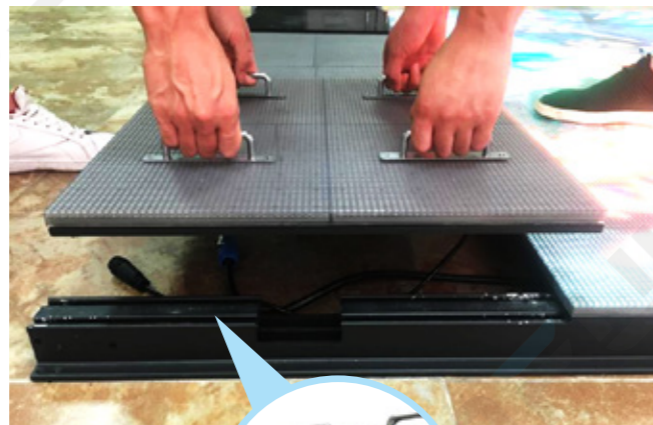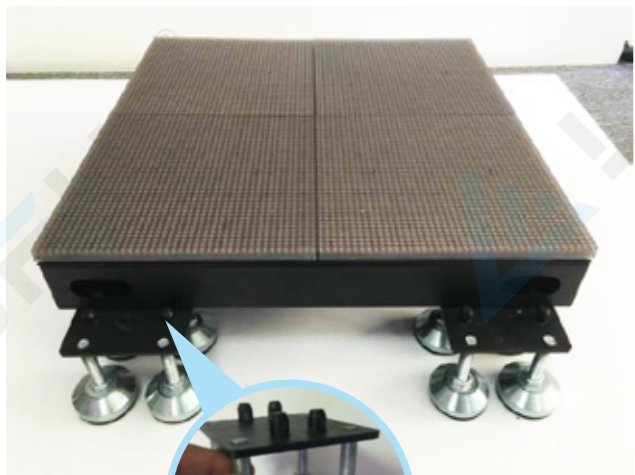

FLOOR Series Classic Cases



Features



Interactive Floor LED Display



Anti-skid, Anti-knock, Anti-glare Mask



Anti scratch Mask with HI-density PC



High Load Bearing with 2T weight



Easy Installation and Maintenance



All weather Resistance